


LS12 ASP.E - FOAMER - SUCTION THROUGH EXTERNAL INJECTOR

Max. flow rate		Col.	Weight	
l/min	USGpm		gr	oz
10	2,6	Black	618	21,8
15	4	Red	617	21,76
25	6,5	Blue	617	21,76

Rated Pressure	200 bar - 20 MPa	2900 psi
Permissible Pressure	220 bar - 22 MPa	3200 psi
Rated Temperature	60 °C	140 °F
Inlet		1/4 F-3/8 MM Bsp

25.1840.21 LS12 Foamer 2,1mm+1L tank
 25.1840.65 LS12 Foamer 1,5mm+1L tank v.2
 25.1840.71 LS12 Foamer 2,1mm+1L tank v.2

25.1842.15 LS12 Foamer 1,5mm+2L tank
 25.1842.65 LS12 Foamer 1,5mm+2L tank

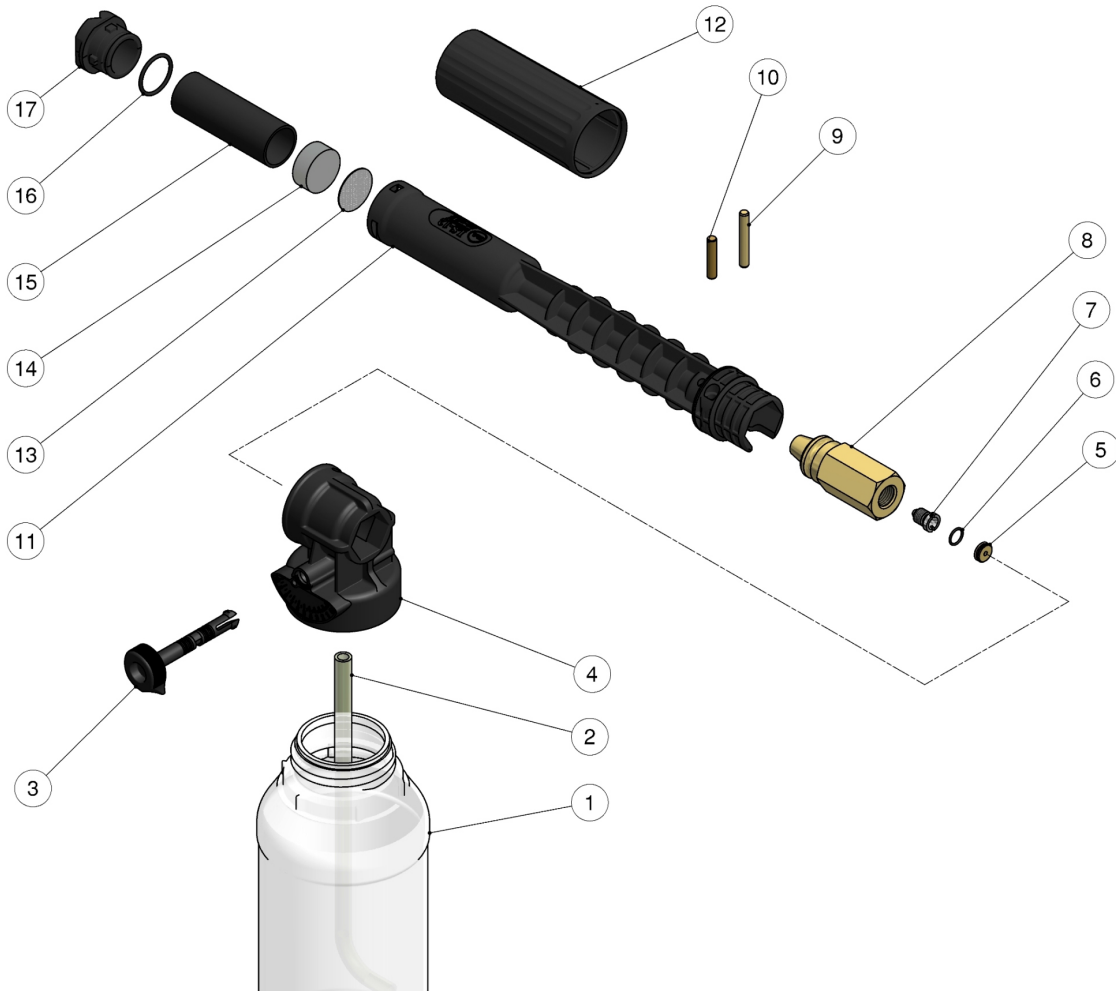

Pos.	P/N	Description	Q.ty	K1	K2	K3	K4	Pos.	P/N	Description	Q.ty	K1	K2	K3	K4
1	14.6506.25	Tank,L,1,0 round-45mm inlet (v.2)	1				10	8	25.1841.31	Injector housing -LS12	1				3
1	14.6507.00	Tank,L,2,0 round-45 mm inlet (1,2)	1				10	9	30.6416.31	Parallel pin, 5x34 mm brass	1				5
2	29.0822.85	Hose, 6x9x230mm PVC transp.	1				10	10	30.0509.31	Parallel pin, 5x24,5 mm brass	1				10
2	29.0852.85	Hose, 6x9x270 mm PVC transp. (1,2)	1				10	11	25.1801.85	Lance housing -LS12 v.2	1				5
3	25.1817.84	Detergent Adjusting Pin	1				5	12	25.1805.84	Knob -LS12 (3,1)	1				5
4	25.1816.84	Tank holder	1				5	12	25.1805.85	Knob -LS12 v.2	1				5
5	25.0085.31	Nozzle insert	1				5	13	29.0802.53	Diaphragm, 25x0,5 mm Sst.	1				10
5	25.1811.31	Nozzle insert (3)	1				5	14	25.1806.51	Pressed strainer,25x10mm Sst.	1				10
6	10.3003.00	O-ring, 1x8 mm	1				10	15	25.1831.85	Spacer ring -LS12	1				5
7	21.0007.51	Nozzle, M8x1 - 1,5 mm Sst.	1				10	16	10.3072.10	O-ring, 1,78x20,35 mm Vi 70	1				10
7	21.0004.51	Nozzle, M8x1 - 2,1 mm Sst. (3)	1				10	17	25.1802.85	Front nozzle -LS10-12 black v.2	1				5